


# Q01 Data Sheet

Manufacturer: Cerámica La Escandella S.A.  
Production site: Agost (Alicante) - Spain  
Brand name: Ridge **Q01**


Dimensions\*  
**A** 410 mm / 18.5 "  
**B** 225 mm / 8.9 "  
**C** 90 mm / 3.5 "

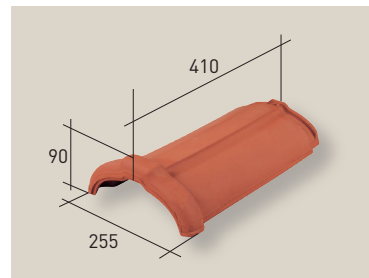

Pieces per ml 3  
Weight per unidad 2,6 kg / 5.7 lbs  
Units per pallet 200

\*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm <sup>3</sup> / cm <sup>2</sup> *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B <sub>roof</sub>

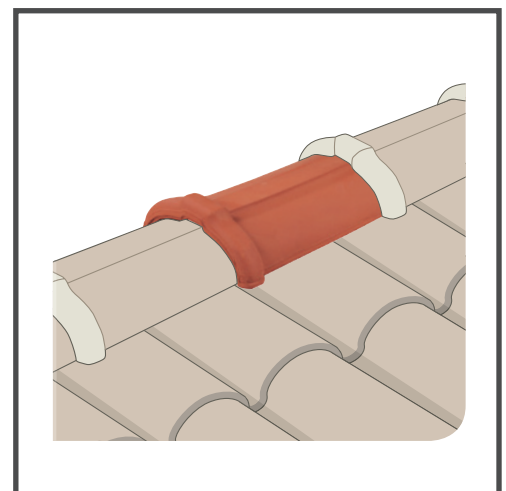

## Additional information

Requieres: Ridge clamp and Alu-rollo  
Superficial finishes: Surface decoration with colored slips  
Ridge cap: Q03  
Encounters: Q07, Q42, Q60 and Q30  
Plug: Q05 and Q06  
Pre-hole: To avoid breakage of special parts is necessary to drill necessary to drill the pre-hole with a screw punch (ø max. 4mm), before nailing or drill the piece directly.



Resistencia a la helada



Impermeabilidad



Resistencia a la flexión



Características geométricas



Conforme a la norma europea

