


Q01*K Data Sheet

Manufacturer: Cerámica La Escandella S.A.
Production site: Agost (Alicante) - Spain
Brand name: Klinker ridge **Q01*K**

Dimensions*
A 400 mm / 15.7 "
B_{max} 250 mm / 9.8 "
B_{min} 215 mm / 8.5 "
C 85 mm / 3.3 "

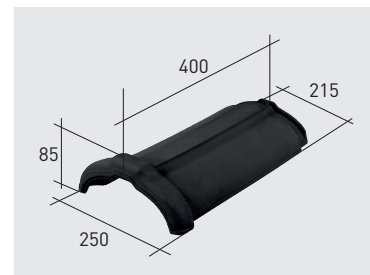

Pieces/ ml 3
Weight piece 2,6 kg / 5.7 lbs
Units per pallet 200

*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm ³ / cm ² *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}


Additional information

Surface finishes: Surface decoration with colored slips

Ridge cap: Q03*K

Encounter: Q44*K and Q45*K

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.

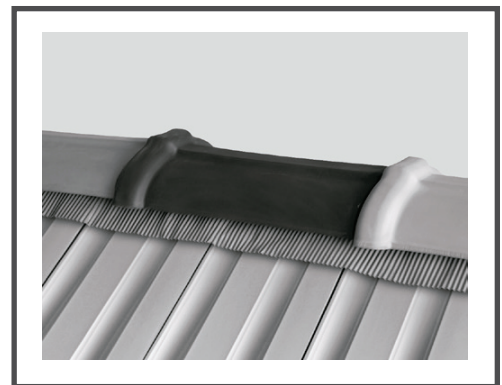

Resistencia a la helada



Impermeabilidad



Resistencia a la flexión



Características geométricas



Conforme a la norma europea

