


Q02*K Data Sheet

Manufacturer: Cerámica La Escandella S.A.
 Production site: Agost (Alicante) - Spain
 Brand name: Klinker circular ridge **Q02*K**

Dimensions*
A 450 mm / 17.7 "
B 209 mm / 8.2 "
C 72 mm / 2.8 "

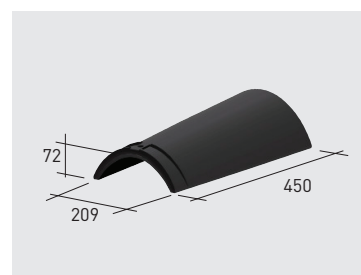

Pieces/ ml 2,5
 Weight piece 3,4 kg / 7.5 lbs
 Units per pallet 110

*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm ³ / cm ² *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}


Additional information

Surface finishes: Surface decoration with colored slips

Ridge cap: Q03*K

Encounter: Q44*K, Q45*K and Q55*K

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.

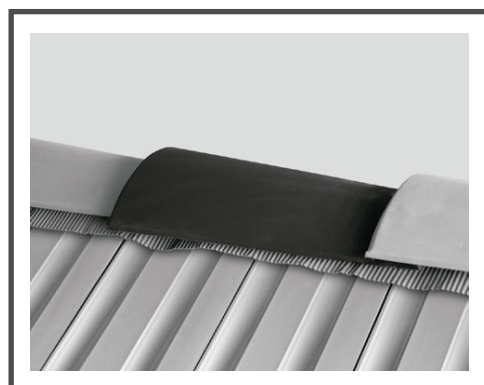

Resistencia a la helada



Impermeabilidad



Resistencia a la flexión



Características geométricas



Conforme a la norma europea

