


Q03*K Data Sheet

Manufacturer: Cerámica La Escandella S.A.
Production site: Agost (Alicante) - Spain
Brand name: Klinker ridge cap **Q03*K**

Dimensions*
A 400 mm / 15.7 "
B 247 mm / 9.7 "
C 88 mm / 3.5 "



Pieces/ ml 2,8 kg / 61.7 lbs
Units per pallet 80

*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

| | | |
|--|----------------|---|
| Structural characteristics: | UNE EN 1304 | ≤ 2,5 |
| Impermeability (cm ³ / cm ² *day): | UNE EN 539-1 | Mean value ≤ 0,5 ; Individual value ≤ 0,6 |
| Froast resistance: | UNE EN 539-2 | ≥ 150 |
| Fire reaction performance: | UNE EN 13501-1 | A1 |
| External fire performance: | UNE EN 13501-5 | B _{roof} |


Additional information

Surface finishes: Surface decoration with colored slips

Ridge cap: Q01*K

Encounter: Q44*K and Q45*K

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.

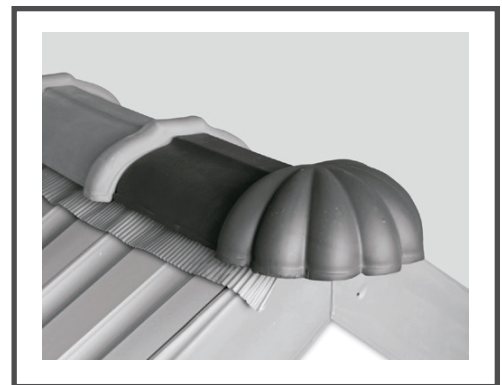

Resistencia a la helada

Impermeabilidad

Resistencia a la flexión

Características geométricas

Conforme a la norma europea