


## Q08\*K Data Sheet

Manufacturer: Cerámica La Escandella S.A.  
 Production site: Agost (Alicante) - Spain  
 Brand name: Klinker wedge **Q08\*K**

Dimensions\*  
**A** 237 mm / 9.3"  
**B** 121 mm / 4.8 "

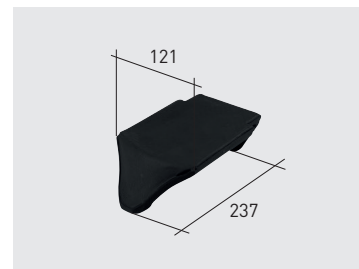

Weight piece 0,8 kg / 1.8 lbs  
 Units per pallet 300

\*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm <sup>3</sup> / cm <sup>2</sup> *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B <sub>roof</sub>

### Additional information

Surface finishes: Surface decoration with colored slips

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.



Resistencia a la helada Impermeabilidad Resistencia a la flexión Características geométricas Conforme a la norma europea