


Q132*K Data Sheet

Manufacturer:	Cerámica La Escandella S.A.
Production site:	Agost (Alicante) - Spain
Brand name:	Selectum klinker fireplace support Q132*K

Dimensions*	A	468 mm / 18.4 "
	B _{max}	280 mm / 11 "
	B _{min}	216 mm / 8.5 "
	C	123 mm / 4.9 "

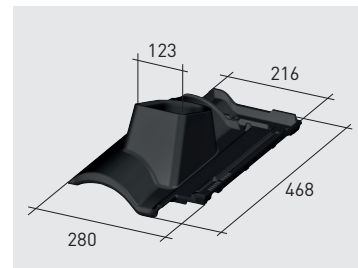

Weight piece	4,2 kg / 9.3 lbs
Units per pallet	32

The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm ³ / cm ² *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}

Additional information

Surface finishes: Surface decoration with colored slips

Fireplace: Q135*k

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.



Resistencia a la helada

Impermeabilidad

Resistencia a la flexión

Características geométricas

Conforme a la norma europea