


Q133*K Data Sheet

Manufacturer: Cerámica La Escandella S.A.
 Production site: Agost (Alicante) - Spain
 Brand name: Selectum klinker left side finish **Q133*K**

Dimensions*
A 465 mm / 18.3 "
B_{max} 155 mm / 6.1 "
B_{min} 138 mm / 5.4 "
C_{max} 70 mm / 2.8 "
C_{min} 53 mm / 2.1 "

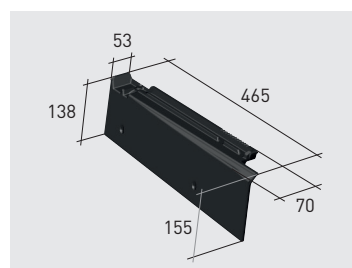

Weight piece 2,2 kg / 4.9 lbs
 Units per pallet 130

The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm ³ / cm ² *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}

Additional information

Surface finishes: Surface decoration with colored slips

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.



Resistencia a la helada

Impermeabilidad

Resistencia a la flexión

Características geométricas

Conforme a la norma europea