


# Q134\*K Data Sheet

Manufacturer: Cerámica La Escandella S.A.  
Production site: Agost (Alicante) - Spain  
Brand name: Selectum klinker right side finish **Q134\*K**

Dimensions\*  
**A** 465 mm / 18.3 "  
**B<sub>max</sub>** 155 mm / 6.2 "  
**B<sub>min</sub>** 138 mm / 5.4 "  
**C<sub>max</sub>** 70 mm / 2.8 "  
**C<sub>min</sub>** 53 mm / 2.1 "

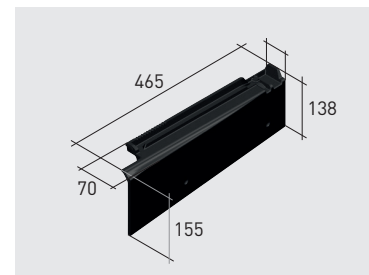

Weight piece 2,3 kg / 5.1 lbs  
Units per pallet 130

\*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm <sup>3</sup> / cm <sup>2</sup> *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B <sub>roof</sub>

## Additional information

Surface finishes: Surface decoration with colored slips

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.



Resistencia a la helada



Impermeabilidad



Resistencia a la flexión



Características geométricas



Conforme a la norma europea

