


Q146*K Data Sheet

Manufacturer: Cerámica La Escandella S.A.
Production site: Agost (Alicante) - Spain
Brand name: 3-water ridge 45° klinker **Q146*K**

Dimensions*
A_{max} 465 mm / 18.3 "
B 145 mm / 5.7 "
C 260 mm / 10.2

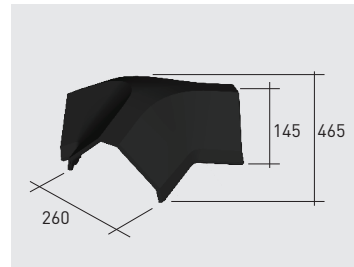

Weight piece 5 kg / 11 lbs
Units per pallet 32

*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%.


Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm ³ / cm ² *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}

Additional information

Surface finishes: Surface decoration with colored slips

Cap: Q145*K

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.

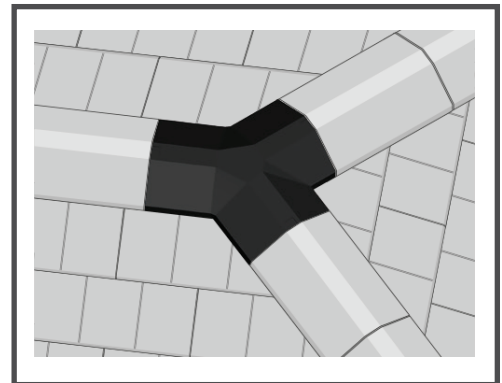

Resistencia a la helada



Impermeabilidad



Resistencia a la flexión



Características geométricas



Conforme a la norma europea

