


# Q23 Data Sheet

Manufacturer: Cerámica La Escandella S.A.  
Production site: Agost (Alicante) - Spain  
Brand name: Curved ventilation tile 50 **Q23**


Dimensions\*  
**A** 500 mm / 19.7 "  
**B** 210 mm / 8.3 "  
**C** 130 mm / 5.1 "

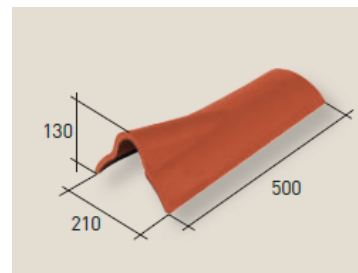

Weight per unit 3,0 kg / 6.6 lbs  
Units per pallet 120

\*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm <sup>3</sup> / cm <sup>2</sup> *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B <sub>roof</sub>

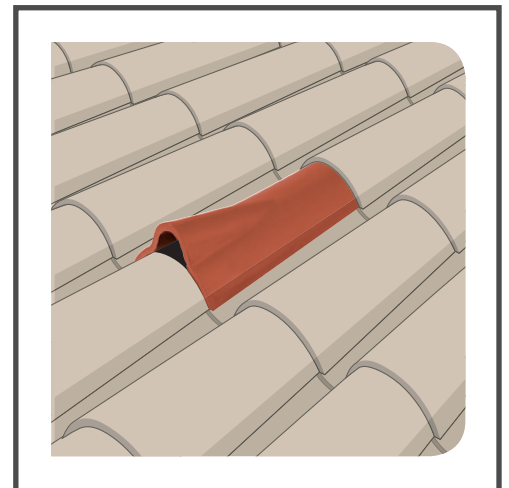

## Additional information

Superficial finishes: Surface decoration with colored

Pre-hole: To avoid breakage of special parts is necessary to drill necessary to drill the pre-hole with a screw punch (ø max. 4mm), before nailing or drill the piece directly.



Resistencia a la helada

Impermeabilidad

Resistencia a la flexión

Características geométricas

Conforme a la norma europea