


Q55*K Data Sheet

Manufacturer: Cerámica La Escandella S.A. Agost
 Production site: (Alicante) - Spain
 Brand name: Klinker 3-way round ridge **Q55*K**

Dimensions*
A_{max} 442 mm / 17.4"
A_{min} 400 mm / 15.8"
B 223 mm / 8.8"
C 56 mm / 2.2"

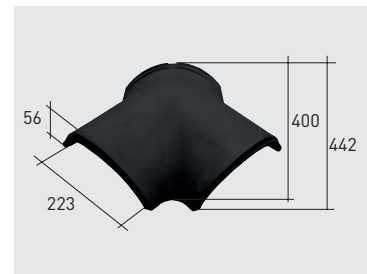

Weight piece 4,1 kg / 9 lbs
 Units per pallet 50

*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%
 **Theoretic value: this should be re-calculated on site with the tiles that are to be used..

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm ³ / cm ² *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}


Additional information

Surface finishes: Surface decoration with colored slips

Ridge cap: Q02*K

Encounter: Q04*K

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.

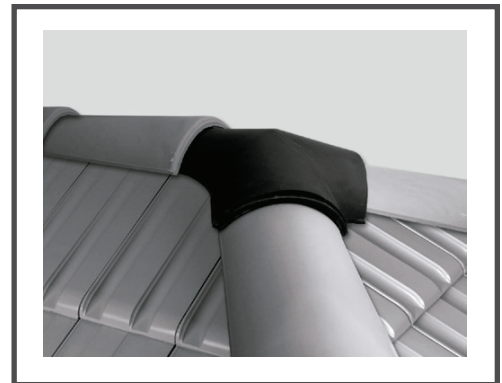

Resistencia a la helada



Impermeabilidad



Resistencia a la flexión



Características geométricas



Conforme a la norma europea

