


Q02 Data Sheet

Manufacturer: Cerámica La Escandella S.A.
Production site: Agost (Alicante) - Spain
Brand name: Ridge **Q02**


Dimensions*
A 465 mm / 15.7 "
B 220 mm / 9.7 "
C 66 mm / 3.5 "

Pieces per ml 2.5
Weight per unit 3.4 kg
Units per pallet 140

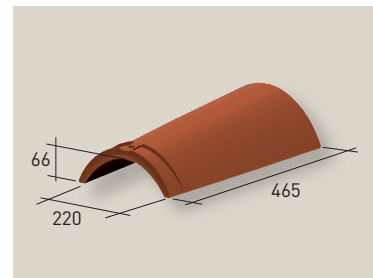

*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm ³ / cm ² *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}

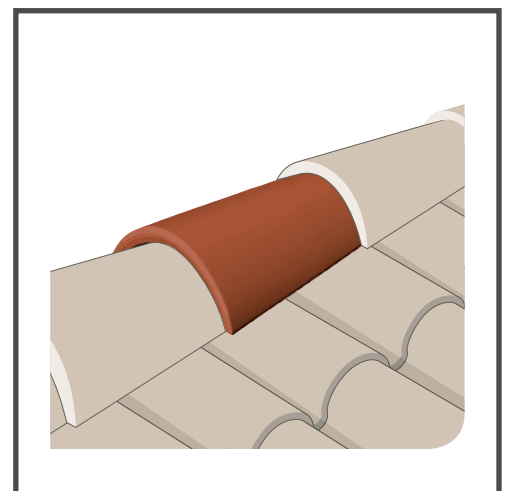

Additional information

Requieres: Ridge clamp and Alu-rollo
Superficial finishes: Surface decoration with colored slips
Ridge cap: Q04 and Q69
Encounters: Q44, Q45 and Q55
Plug: Q58, Q64, Q68 and Q83
Pre-hole: To avoid breakage of special parts is necessary to drill necessary to drill the pre-hole with a screw punch (ø max. 4mm), before nailing or drill the piece directly.



Resistencia a la helada



Impermeabilidad



Resistencia a la flexión



Características geométricas



Conforme a la norma europea

