


# Q110\*K Data Sheet

Manufacturer: Cerámica La Escandella S.A.  
Production site: Agost (Alicante) - Spain  
Brand name: Attic ridge clinker raised lace **Q110\*K**

Dimensions\*  
**A** 455 mm / 18 "  
**B** 266 mm / 10.5 "  
**C** 90 mm / 3.5 "

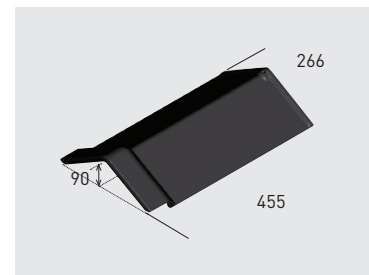

Pieces per ml 2,5  
Weight piece 3,5 kg / 7.8 lbs  
Units per pallet 110

\*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm <sup>3</sup> / cm <sup>2</sup> *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B <sub>roof</sub>


## Additional information

Surface finishes: Surface decoration with colored slips

Ridge cap: Q109\*K

Encounter: Q111\*K

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 4mm) before nailing or drill the stone directly.

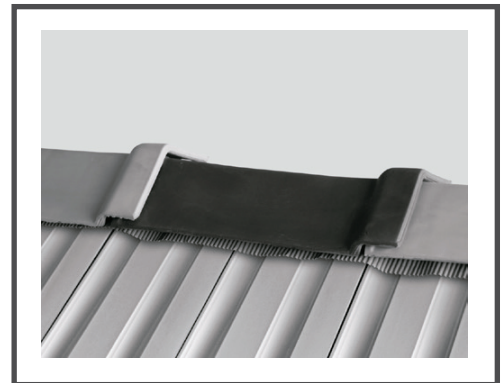

Resistencia a la helada

Impermeabilidad

Resistencia a la flexión

Características geométricas

Conforme a la norma europea