


Q90*K Data Sheet

Manufacturer:	Cerámica La Escandella S.A.
Production site:	Agost (Alicante) - Spain
Brand name:	Attic ridge 120° klinker Q90*K

Dimensions*	A	450 mm / 17.7 "
	B_{max}	250 mm / 9.9 "
	B_{min}	195 mm / 7.7 "
	C	60 mm / 2.4 "

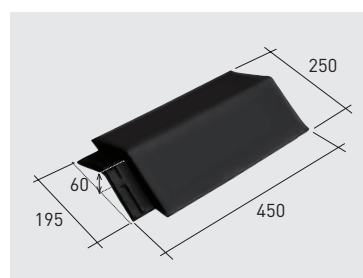

Pieces per ml	2,5
Weight unit	3,4 kg / 7.5 lbs
Units per pallet	100

*The tile dimensions indicated in this chart allow a tolerance of approximately +/-2%

Structural characteristics:	UNE EN 1304	≤ 2,5
Impermeability (cm ³ / cm ² *day):	UNE EN 539-1	Mean value ≤ 0,5 ; Individual value ≤ 0,6
Froast resistance:	UNE EN 539-2	≥ 150
Fire reaction performance:	UNE EN 13501-1	A1
External fire performance:	UNE EN 13501-5	B _{roof}


Additional information

Surface finishes: Surface decoration with colored slips

Ridge cap: Q109*K

Encounters: Q111*K

Pre-hole: To avoid breakage of the special pieces, it is necessary to drill the pre-hole with a screw (ø max. 3.5 mm), before nailing or drilling the piece directly.

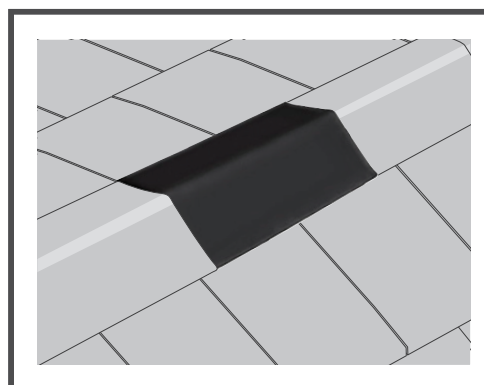

Resistencia a la helada



Impermeabilidad



Resistencia a la flexión



Características geométricas



Conforme a la norma europea

